


	HYMI LAMINATING FILMS GLOSS		MICRONS	SIZE
	ITEM CODE			
	CHGPA380		80	A3
	CHGPA3100		100	A3
	CHGPA3125		125	A3
	CHGPA3175		175	A3
	CHGPA480		80	A4
	CHGPA4100		100	A4
	CHGPA4125		125	A4
	CHGPA4175		175	A4
LAMINATING FILMS - MATT	CHGPA580		80	A5
	CHMA3100		100	A3
	CHMA3125		125	A3
	CHA4100		100	A4
	CHA4125		125	A4
	CHGPA5125		125	A5
	CHGPA5486100		100	54X86
	CHGPA6090100		100	60X90
	CHGPA6095100		100	60X95
	CHGPA6100		100	A6
	CHGPA6595100		100	65X95
	CHGPA6595125		125	65X95
	CHGPA70110100		100	70X110
	HYMI LAMINATING MACHINES			SIZE
	CHFGK220			A4
	CHFGK320			A3



HYMI COMB BINDING MACHINE - **SMALL**

ITEM CODE : CHS308



HYMI COMB BINDING MACHINE - **LARGE**

ITEM CODE : CHS9025



HYMI BINDING COVERS PVC - **200 MICR.**

ITEM CODE : CHPVCCL

BARCODE : 8887066892990

ITEM CODE : CHPVCCLA3

BARCODE : 8887066894208

护卡膜 Laminating Film


- 透明膜 Glossy Film
- 彩膜 Color Film
- 背胶膜 Stick back Film
- 毛面膜 Matt Film
- 激光防伪膜 Hologram Film

厚度 Thickness	尺寸 Size
32mic	54*86mm
38mic	60*90mm
45mic	65*95mm
60mic	70*100mm
75mic	75*105mm
80mic	80*110mm
100mic	95*135mm
125mic	108*157mm
150mic	111*154mm
175mic	154*216mm
200mic	158*220mm
250mic	216*303mm
350mic	220*307mm
	263*370mm
	267*384mm
	303*426mm
	307*430mm
	...

Any specification can be producible between
from credit card to A2.

Roll film: max.width 1260mm.



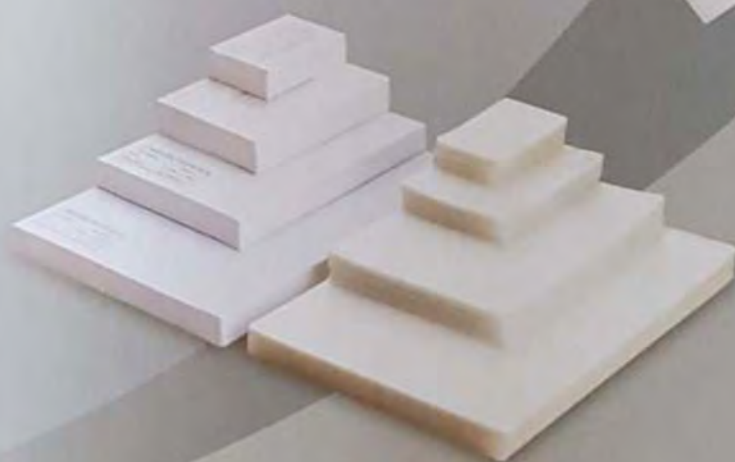



预涂膜 BOPP Film

- 光膜 Glossy Film
- 哑膜 Matt Film

Core Size: 1" / 58mm / 76mm

Thickness: 20mic / 25mic / 28mic / 30mic / 32mic



冷裱膜 Cold Laminating film

- 2801 Transparent
- 2802 Foggy
- 2803 Pearl
- 2804 Leather
- 2805 Diamond
- 2806 Cross Texture
- 2807 Cross Texture
- 2808 Clothbound
- 2809 Clothbound
- 2811 Clothbound
- 2812 Magic
- 2813 Lozenge Diamond
- 2814 Silk
- 2815 Marble

Size: 25" × 34Yard (31M)

36" × 34Yard (31M)

42" × 34Yard (31M)

制卡材料 Card Maker

- Sheet "A" -Translucent
- Sheet "B" -Non Transparent




Tip: If printing a back to back document, card, invitation, etc., ensure that when you print on to the sheets "A", the correct alignment of each sheet.





投影膜 OHP Film

- 手写用
- 复印用
- 激光打印用
- 喷墨打印用
- 尺寸: A4 210 x 297mm
- 厚度: 100mic
- Write On Film
- PPC(plain paper copier) Film
- Laser Print Film
- Inkjet Film
- Size: A4 210 x 297mm
- Thickness: 100mic

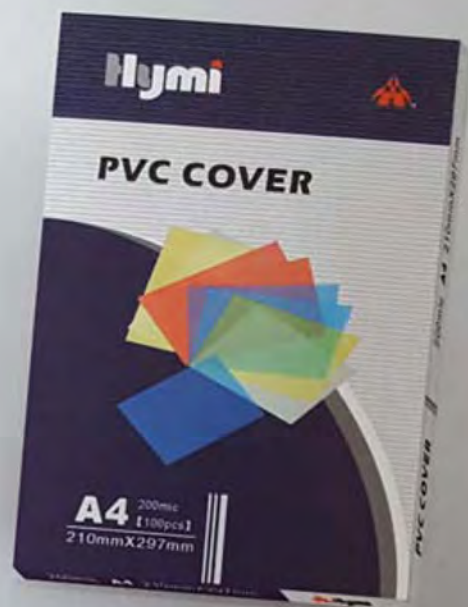

封面膜 Cover

- PVC封面膜 PVC Cover

尺寸 Size: A4 210 x 297mm

厚度 Thickness: 130-300mic

颜色 Colour:

透明(Clear) / 红色(Red) / 绿色(Green) /

蓝色(Blue) / 黄色(Yellow) / 黑色(Black)

- PP封面膜 PP Cover (Sand Stripe)

尺寸 Size: A4 210 x 297mm

厚度 Thickness: 300-600mic

颜色 Colour:

透明(Clear) / 红色(Red) / 绿色(Green) /

蓝色(Blue) / 黄色(Yellow) / 黑色(Black)

- 皮纹纸 Paper Cover Paper

尺寸 Size: A4 210 x 297mm

厚度 Thickness: 230g

颜色 Colour: 14 colours



Hangzhou Hengmei Lami Co., Ltd

过塑机 Laminator



I FGK120



II FGK320



III FGK-330C

	Model	Laminating Speed	Laminating Width
I	FGK120	0.2mm/min	≤120 mm
	FGK220	0.5mm/min	≤220 mm
II	FGK260	0.5mm/min	≤260 mm
	FGK320	0.6m/min	≤320 mm
III	FGK 330C	0.6m/min	≤330mm
	FGK 230C	0.6m/min	≤230mm
IV	FGK -450T	May Timing	≤450mm
	FGK -330T	May Timing	≤330mm

Laminating Thickness	Operating Temperature	Number of Rollers	Heating Method	Power Supply (Optional)	Power Consumption	Dimension	Weight
≤1.5mm	100-160℃	2	Infrared Rays Heating	AC100、120、220、240V/50、60Hz	230W	220×160×90mm	2.4kg
≤2mm	100-160℃	4	Infrared Rays Heating	AC100、120、220、240V/50、60Hz	420W	400×200×110mm	6.2kg
≤2mm	100-160℃	4	Infrared Rays Heating	AC100、120、220、240V/50、60Hz	520W	400×200×110mm	6.8kg
≤2mm	100-160℃	4	Infrared Rays Heating	AC100、120、220、240V/50、60Hz	550W	500×200×110mm	7.7kg
≤2mm	100-160℃	4	Infrared Rays Heating	AC100、120、220、240V/50、60Hz	550W	500×240×105mm	8.5kg
≤2mm	100-160℃	4	Infrared Rays Heating	AC100、120、220、240V/50、60Hz	550W	300×240×105mm	6.5kg
≤2mm	90-180℃	4	Mica sheet Heating	AC100、120、220、240V/50、60Hz	1000W	660×280×135mm	15.5kg
≤2mm	90-180℃	4	Mica sheet Heating	AC100、120、220、240V/50、60Hz	620W	540×280×135mm	13.8kg



IV FGK450T



[过塑机 Laminator



V FGK330-6R

Model	FGK 330-6R
Laminating Speed	300-1500mm/min
Max. Laminating Width	330 mm(A3)
Laminating Thickness	≤1mm
Operating Temperature	51-160
Heating Method	HOT ROLL
Control System	8-Bit Microprocessor
Display System	digital display
Cooling System	DC fan
Driving Motor	DC Gear Shift Motor
Number Of Rollers	6(4 for heating)
Power Supply(Optional)	AC 110、120、220、240V/50、60Hz
Power Consumption	1150W
Dimention	550×295×135 mm
Weight	17 kg

Item NO	SF-160	SF-260	SF-320
Max Laminating width	160mm	260mm	320mm
Laminating TEMP	90°-110	90°-110	90°-110
Max Laminating thickness	1mm	1mm	1mm
Voltage	AC220V, or 110V	AC220V, or 110V	AC220V, or 110V
Power	400W	500W	620W
N.Weight	5.5kg	6.5kg	7.5kg
Inner box size(cm)	37*5*25*15	48*5*25*15	54*25*15
Carton box size(cm)	41*27.5*68	49*27*65.5	56*26.5*61
Packing	4units	4units	4units

VI SF320



覆膜机 Roll Laminator



Model	LR-360
Laminating Speed	200-1600 mm/min
Laminating Width	≤355mm
Laminating Thickness	≤5mm
Operating Temperature	0-140
Heating Method	Hot roller
Power Supply (Optional)	AC 110 120 220 240V/50 60Hz
Power Consumption	1100w
Dimension	620×520×310 mm
Core Size (in.)	1"
Weight	28 kg

Model	LR-650	LR-1100
Laminating Speed	200-1600 mm/min	200-1600 mm/min
Laminating Width	≤645mm	≤1050mm
Laminating Thickness	≤5mm	≤5mm
Operating Temperature	0-140	0-140
Heating Method	Hot roller	HOT ROLL
Power Supply (Optional)	AC 110 120 220 240V/50 60Hz	AC 110 120 220 240V/50 60Hz
Power Consumption	1800w	2000w
Dimension	910×520×310 mm	1370×520×1170mm
Core Size (in.)	1", 2.25"	2.25" 3"
Weight	38 kg	70 kg



相纸 Photo Inkjet Paper

- 相纸 Photo Paper: 135g、185g、200g、220g、230g、250g、RC200g
- 彩喷纸 Color Inkjet Paper: 110g、130g
- 两面用彩喷纸 Double Side Inkjet Paper: 140g、230g
- 背胶相纸 Self-adhesive Glossy Photopaper





• HM-S308

Plastic ring binding machine

Max. Punching: 12sheets (80g paper)

Max. Binding: 250sheets (25mm ring)

Margin adjustable range: 2.5mm-6.5mm

Number of holes: 21 holes

Hole distance: 14.3mm



• HM-S900

Comb and binding machine

Max. Punching: 25sheets (80g paper)

Max. Binding: 380sheets (38mm ring)

Margin adjustable range: 2.5mm-5.5mm

Number of holes: 21holes, adjustable

Hole distance: 14.3mm

Metal body



• HM-S950

Plastic ring binding machine

Max. Punching: 20sheets (80g paper)

Max. Binding: 500sheets (51mm ring)

Margin adjustable range: 2.5mm-6.5mm

Number of holes:

21 holes, adjustable all of pull-push pins

Hole distance: 14.3mm

Metal body



• HM-S960

Plastic ring binding machine

Max. Punching: 20sheets (80g paper)

Max. Binding: 500sheets (51mm ring)

Margin adjustable range: 2.5mm-6.5mm

Number of holes:

24 holes, adjustable all of pull-push pins

Hole distance: 14.3mm

Metal body



• HM-S980

Plastic ring binding machine

Max. Punching: 25sheets (80g paper)

Max. Binding: 500sheets (51mm ring)

Margin adjustable range: 2.5mm-6.5mm

Number of holes:

24 holes, adjustable all of pull-push pins

Hole distance: 14.3mm

Metal body

• HM-S9025

Wire binding machine

Max. Punching ability:

20pages (80g paper), PVC cover 6-pages;

Max. Binding ability:

500(51mm comb binding ring);

Margin adjustable range: 2.5mm-6.5mm;

Number of holes: 21 holes;

Hole distance: 14.3mm;

N.W:7.6kgs



• HM-S9026

Comb binding machine

Max. Punching ability:

20pages (80g paper), PVC cover 6-pages;

Max. Binding ability: 500(51mm comb binding ring);

Margin adjustable range: 2.5mm-6.5mm;

Number of holes: 21 holes, adjustable all of pull-push pins;

Hole distance: 14.3mm;

N.W:8.6kgs

Metal body;



• HM-S328

Max. Punching ability:

16pages (80g paper), PVC cover 6 sheets;

Max. Binding ability: 250sheets (25mm rings)

Margin adjustable range: 2.5mm-6.5mm;

Number of holes: 21 holes, adjustable all of pull-push pins;

Hole distance: 14.3mm;

N.W:4.8kgs



• HM-ST800

Comb and wire double function binding machine

21 holes for ring, 34 holes for wire;

Max. Punching : 20sheets (80g paper)

Max. Binding : 500sheets(51mm ring),

250sheets (25.4mm wire)



• HM-ST2960

24 rectangle holes for comb binding,

40 holes for wire binding;

Max. Punching ability: 25pages (80g paper).

Max. Binding ability:

500(51mm comb binding ring),

120page (14.3mm wire);

Dimension: 566×525×350mm;

N.W:25.5kgs

Metal body;



Hangzhou Hengmei Lami Co., Ltd



• HM-C9027

Max. Punching ability:
20pages (80g paper), PVC cover 6-pages;
Max. Binding ability: Arbitrary;
Margin adjustable range: 2mm-6mm;
Number of holes: 46 holes;
Hole distance: 6.35mm;
N.W: 8.6kgs



• HM-C9028

Max. Punching ability:
20pages (80g paper), PVC cover 6-pages;
Max. Binding ability: Arbitrary;
Margin adjustable range: 2mm-6mm;
Number of holes:
46 holes; adjustable all of pull-push pins;
Hole distance: 6.35mm;
N.W: 9.6kgs
Metal body;



• HM-T318

Wire binding machine
Max. Punching : 12sheets (80g paper)
Max. Binding : 120sheets (14.3mm wire)
Number of holes: 34holes (3-1)



• HM-C338

Coil binding machine
Max. Punching ability:
12pages (80g paper), PVC cover 4 sheets;
Margin adjustable range: 2mm-6mm;
Hole distance: 6.35mm;
Hole specification: 4mm
Number of holes: 46 holes



• HM-C348

Coil binding machine
Max. Punching ability:
12pages (80g paper), PVC cover 4 sheets;
Max. Binding ability: Arbitrary
Margin adjustable range: 2mm-6mm;
Hole distance: 6.35mm;
Hole specification: 4mm
Number of holes: 46 holes

• HM-T930

Wire binding machine

Max. Punching : 20sheets (80g paper)
Max. Binding : 120sheets (14.3mm wire)
Margin adjustable range: 2.5mm-6.5mm
Number of holes: 40 holes,
 adjustable all of pull-push pins (3:1)
 Metal body



• HM-T970 (T970R)

Wire binding machine

Max. Punching : 20sheets (80g paper)
Max. Binding : 120sheets (14.3mm wire)
Margin adjustable range: 2.5mm-6.5mm
Number of holes: 40 holes,
 adjustable all of pull-push pins (3:1)
 Metal body



• HM-TT 2930

Binding machine;

wire 3:1 & wire 2:1
 40 holes for wire P 3:1;
 27 holes for wire P 2:1g;
Max. Punching ability:
 25pages (80g paper);
Max. Binding ability:
 120page (14.3mm wire);
 250page (25.4mm wire);
Dimension: 566×525×350mm;
N.W: 25.5kgs
 Metal body;

• HM- T970E

Max. Punching ability:
 20pages (80g paper), PVC cover 6-pages;
Max. Binding ability: 250(25.4mm wire);
Margin adjustable range: 2.5mm-6.5mm;
Number of holes:
 27 holes, adjustable all of pull-push pins (2:1*);
 Metal body;
N.W: 17.5kgs



• HM-T9029

Wire binding machine

Max. Punching ability:
 20pages (80g paper), PVC cover 6-pages;
Max. Binding ability: 120(14.3mm wire);
Margin adjustable range: 2.5mm-6.5mm;
Number of holes:
 34 holes, adjustable all of pull-push pins (3:1*);
Hole distance: 8.47mm;
N.W: 11.6kgs
 Metal body



Hangzhou Hengmei Lami Co., Ltd

[装订线圈 Ring Binding



I 胶圈 Plastic Ring Binding

A4: 21 Rings

圆形	Round	椭圆形	Oval
1/4"	6mm	1-1/4"	32mm
5/16"	8mm	1-3/8"	35mm
3/8"	10mm	1-1/2"	38mm
7/16"	11mm	1-3/4"	45mm
1/2"	12mm	2"	51mm
9/16"	14mm		
5/8"	16mm		
3/4"	19mm		
7/8"	22mm		
1"	25mm		
1-1/8"	28mm		

II 单线圈 Spiral Coil



A4: 48 Rings

Pitch	Size	
4:1	6mm	16mm
	7mm	18mm
	8mm	20mm
	9mm	22mm
	10mm	25mm
	11mm	28mm
	12mm	30mm
	13mm	32mm
	14mm	35mm
	15mm	


Multi-color and pitch available

III 双线圈 Double Wire

Pitch	Size		Number of loops
3:1	3/16"	3.5mm	118,000
	1/4"	6mm	80,000
	5/16"	8mm	58,000
	3/8"	10mm	42,000
	7/16"	11mm	28,000
	1/2"	12mm	24,000
	9/16"	14mm	18,000
2:1	5/8"	16mm	10,000
	3/4"	19mm	7,000
	7/8"	22mm	4,500
	1"	25mm	3,600
	1 1/8"	28mm	3,000
	1 1/4"	32mm	2,000
	1 1/2"	38mm	2,000



Hangzhou Hengmei Lantai Co., Ltd.

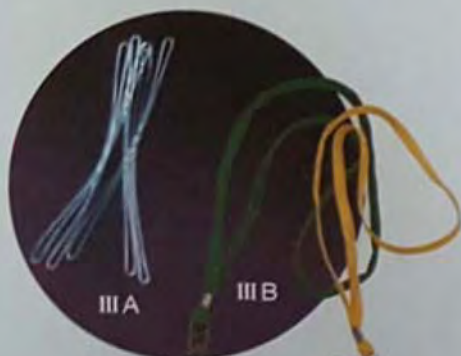

IIIA

IIIB

IVA

IVB



[其它 Others

- Slot Punch
(IA, IB, IB', IC, ID)
- Clip (II, III, IO, IP, IU)
- Loop (IIIA, IIIB)
- Corner Rounder (VA, C005, C003)
- ID card
- Plastic badge Reel
- Card Cutter



ID Card



C003



C005



VA

OTHERS

www.hymc.cn



I D

I C

I B'

I B



Hangzhou Hengmei Lantai Co., Ltd.